


SERIE VR

VR



VR

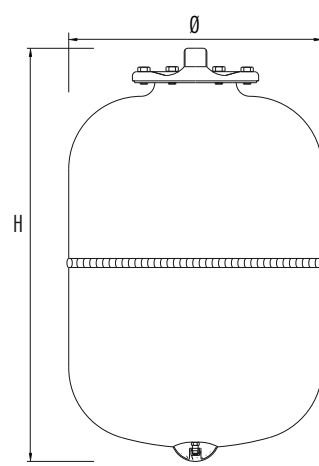

Vaso d'espansione con membrana intercambiabile per circuiti chiusi di riscaldamento.
Expansion vessel with replaceable membrane for closed heating systems.
Vase d'expansion à vessie remplaçable pour systèmes de chauffage.
Ausdehnungsgefäß für Heizungsanlagen.
Vaso de expansión con membrana recambiable para circuitos de calefacción.

Temperatura d'esercizio
Working temperature
Température d'exercice
Betriebstemperatur
Temperatura de trabajo

- 10° C
+ 100° C

Colore della verniciatura esterna
External finish color
Couleur de la peinture externe
Externe Beendenfarbe
Color pintura exterior

RAL 3000

Membrana in gomma
Rubber membrane
Vessie en gomme
Gummimembrane
Membrana en goma

EPDM

Controflangia zincata - Counter flange galvanized
Contre-bride galvanisé - Gegenflansch verzinkt - Contra brida galvanizada




Garanzia sul prodotto mesi: - Warranty months:
Garantie mois: - Monate Garantie: - Garantía meses:

24

Modello Model Modèle Model Modelo	Codice Code Code Code Código	Altezza Height Hauteur Höhe Altura H (mm)	Diametro Diameter Diamètre Durchmesser Diámetro Ø (mm)	Lunghezza Length Longeur Länge Longitud L (mm)	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck Presión máxima de trabajo (bar)	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck Presión de precarga estándar (bar)	Imballo Packing Emballage Verpackung Embalaje (mm)	Attacco Connection Raccordement Anschluss Conexión (inch)
VR5	AADRE00R01BD1	300	160	-	8	1,5	(Pz8) 350X350X630	3/4 "
VR8	AAERE00R01BA1	315	200	-	8	1,5	(Pz1) 220X220X335	3/4 "
VR12	AAFRE00R01BA1	295	280	-	8	1,5	(Pz1) 285X285X335	3/4 "
VR18	AAGRE00R01BA1	430	280	-	8	1,5	(Pz1) 290X290X450	3/4 "
VR24	AAIRE00R01DA1	483	280	-	8	1,5	(Pz1) 290X290X510	3/4 "
VR35	AAJRE00R01DA1	440	365	-	8	1,5	(Pz1) 380X400X460	3/4 "
VR50	AAKRE00R01DA1	585	365	-	8	1,5	(Pz1) 380X400X590	3/4 "

VRV

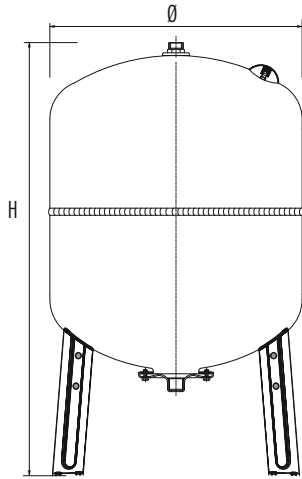

VRV ≤ 150



VRV > 150



Vaso d'espansione con membrana intercambiabile per circuiti chiusi di riscaldamento.
Expansion vessel with replaceable membrane for closed heating systems.
Vase d'expansion à vessie remplaçable pour systèmes de chauffage.
Ausdehnungsgefäß für Heizungsanlagen.
Vaso de expansión con membrana recambiable para circuitos de calefacción.

Temperatura d'esercizio
Working temperature
Température d'exercice
Betriebstemperatur
Temperatura de trabajo

- 10° C
+ 100° C

Colore della verniciatura esterna
External finish color
Couleur de la peinture externe
Externe Beendenfarbe
Color pintura exterior

RAL 3000

Membrana in gomma
Rubber membrane
Vessie en gomme
Gummimembrane
Membrana en goma

EPDM

Controflangia zincata - Counter flange galvanized
Contre-bride galvanisé - Gegenflansch verzinkt - Contra brida galvanizada



Garanzia sul prodotto mesi: - Warranty months:
Garantie mois: - Monate Garantie: - Garantía meses:

24

Modello Model Modèle Model Modelo	Codice Code Code Code Código	Altezza Height Hauteur Höhe Altura H (mm)	Diametro Diameter Diamètre Durchmesser Diámetro Ø (mm)	Lunghezza Length Longeur Länge Longitud L (mm)	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck Presión máxima de trabajo (bar)	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck Presión de precarga estándar (bar)	Imballo Packing Emballage Verpackung Embalaje (mm)	Attacco Connection Raccordement Anschluss Conexión (inch)
VRV35	AJRE01R01DA1	450	365	-	8	1,5	(Pz1) 380X400X460	3/4 "
VRV50	AAKRE01R01DA1	582	365	-	8	1,5	(Pz1) 380X400X590	3/4 "
VRV60	AALRE01R01DA1	668	365	-	8	1,5	(Pz1) 380X400X700	3/4 "
VRV80	AAMRE01R01EA1	717	415	-	8	1,5	(Pz1) 430X450X730	1 "
VRV100	AANRE01R01EA1	675	495	-	8	1,5	(Pz1) 510X540X700	1 "
VRV150	AAPRE01R01EA1	790	550	-	8	1,5	(Pz1) 570X610X850	1 "
VRV200	AAQRE01R21EA1	1085	600	-	8	1,5	(Pz1) 610X620X1111	1 "
VRV250	AARRE01R21EA1	1051	650	-	8	1,5	(Pz1) 670X680X1290	1 "
VRV300	AASRE01R21EA1	1212	650	-	8	1,5	(Pz1) 670X680X1290	1 "

Controflangia verniciata - Painted counter flange
Contre-bride peinte - Lackierter Gegenflansch - Contra brida pintada



Garanzia sul prodotto mesi: - Warranty months:
Garantie mois: - Monate Garantie: - Garantía meses:

24

Modello Model Modèle Model Modelo	Codice Code Code Code Código	Altezza Height Hauteur Höhe Altura H (mm)	Diametro Diameter Diamètre Durchmesser Diámetro Ø (mm)	Lunghezza Length Longeur Länge Longitud L (mm)	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck Presión máxima de trabajo (bar)	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck Presión de precarga estándar (bar)	Imballo Packing Emballage Verpackung Embalaje (mm)	Attacco Connection Raccordement Anschluss Conexión (inch)
VRV400	AATRE01R21FA1	1198	750	-	8	1,5	(Pz1) 800X800X1200	1 1/4 "
VRV500	AAURE01R21FA1	1438	750	-	8	1,5	(Pz1) 750X770X1510	1 1/4 "
VRV600	AAVRE01R11FP1	1634	750	-	8	1,5	(Pz1) 800X800X1740	1 1/4 "